



WiFi
DOOR SENSOR
INSTRUCTION





Thanks for
Choosing our WiFi Smart Home Sensors

Product Configuration



USB Port Indicator Tamper probe
Battery Reset button



Specifications

Detect open/close status of the door/window
Anti-demolition function,push notification when device is removed
Battery:CR123A*1 3V
USB Power supply :5V/1A
Standby current :27.9uA
Wireless frequency: 2.4GHz
Wireless standard: IEEE 802.11b/g/n
Wi-Fi range: 45M
Size:
Main body: 82mm x 27mm x 23mm
Deputy body: 50mm x 13mm x 16mm

LED State

| Device Status | LED State |
|-------------------|----------------------------------|
| Smart Wi-Fi | Indicator flashes 2times/s |
| AP mode | Indicator flashes 1time every 2s |
| Turn on | Indicator flashes |
| Turn off | Indicator off |
| Reset/Adding mode | Pressing button for 5-7s |

Notice: Powered by USB,door sensor won't be in sleep mode

How to reset?

- (1) Press the reset button for 6 seconds till the indicator flash rapidly.Then device turns to smart wifi mode.
- (2) Press the reset button again for 6 seconds till the indicator flash slowly. The device turns to AP mode.

Get Started with Tuya Smart App

1. Download APP

- Download the "Smart life" app from APP Store or Google Play to your mobile.




2. Register and Login

- Launch the "Smart life" app.
- To register,enter your mobile phone number or email address,create a password ,then login to the app.
- **Login if you have an account already.**

3. Add Device

- Power on the smart sensor which default's mode is **Smart WiFi** mode.
- Select the "+" symbol on the top right-hand corner.
- Select your product type and follow the instructions of the app.
- **If the connecting fails,try using AP Mode**
- On the "Add device" page select "AP Mode" on the top right-hand corner and follow the instructions of the app.
- Finally,have fun!

What's the App User Interface Like ?

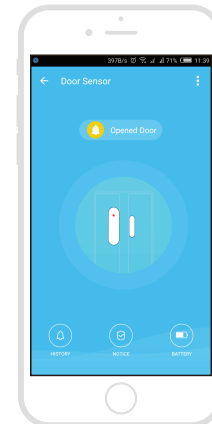

Smart life


Experience Advanced Features

You can experience the various advanced features of the product with the app, just try and do it yourself.

Main fuction

Tamperproof

- When the door magnetic shell is removed, the app will receive the push notice and report the door magnetic open / close status (the tamper-proof alarm has push notification only , no history)



Alarm record

- Device record
- APP recording: Check all the added devices alarm message in history

Other fuction

Linkage alarm setting

- To connect two Sensors via scene setting.

Device sharing

- Allow others to control the device

Push notification

- Open/close push notification

Remove device

- Restore default settings; Delete and add the device again to clear the record by APP.



Make Your Home Smarter