


MOTION SENSOR


With temperature and humidity sensor

INSTRUCTION



Thanks for
Choosing our WiFi Smart Home Sensors

Product Configuration

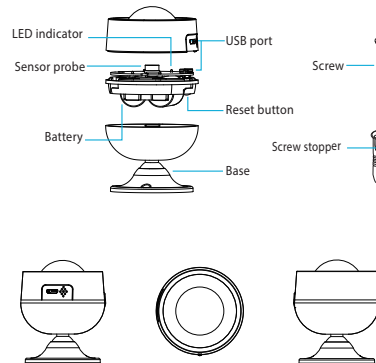

Specifications

Battery: CR123A 3V*2
USB power: 5V/1A
Standby current: 60uA
Detect range: 10M
Detect angle: 120°
Detect temperature: -10℃ ~ 0℃
Detect humidity: 0% ~ 100%
Wireless type: 2.4GHz
Wireless standard: IEEE 802.11b/g/n
Wireless range: 45M
Operating temperature: 0℃ ~ 40℃
Operating humidity: 20% ~ 85%
Size: 68mm x 56mm x 56mm

LED State

Device Status	LED State
Smart Wi-Fi	Indicator flashes 2times/second
AP mode	Indicator flashes 1time /2 seonds
Reset	Pressing button for 5-7s
Pairing mode	Indicator light continues to flash for 1 minute

NOTE:

1. Powered by USB,PIR sensor won't be in sleep mode
2. Device detects every 1 min,will alarm continuously when movement is detected
3. Support 2.4GHz Wi-Fi only ;
4. When the power supply is switched, there will be a delay in the APP display
5. Default temperature alarm range: 64°F - 122°F;Default humidity alarm range: 40% - 80% RH

How to reset?

- (1) Press the reset button for 6 seconds till the indicator flash rapidly.Then device turns to smart wifi mode.
- (2) Press the reset button again for 6 seconds till the indicator flash slowly. The device turns to AP mode.

Get Started with Tuya Smart App

1. Download APP

- Download the "Smart life" app from APP Store or Google Play to your mobile.




2. Register and Login

- Launch the "Smart life" app.
- To register,enter your mobile phone number or email address,create a password ,then login to the app.
- **Login if you have an account already.**

3. Add Device

- Power on the smart sensor which default's mode is **Smart WiFi** mode.
- Select the "+" symbol on the top right-hand corner.
- Select your product type and follow the instructions of the app.
- **If the connecting fails,try using AP Mode**
- On the "Add device" page select "AP Mode" on the top right-hand corner and follow the instructions of the app.
- Finally,have fun!

What's the App User Interface Like ?

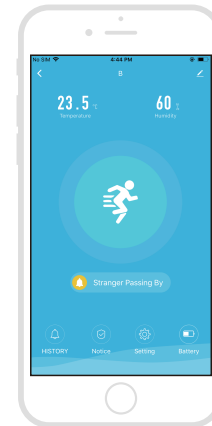

Smart life

Experience Advanced Features

You can experience the various advanced features of the product with the app, just try and do it yourself.

Main fuction

- 1. Tamper-proof**
 - When PIR housing is taken, app will push notification.
- 2. Temperature and humidity detection**
 - Powered by battery, short press button for 2 times . the indicator will be flashing .PIR is in paring mode, users can edit the alarm scale of temperature and humidity and temperature's remark.
- 3. Alarm record**
 - Device record
 - APP recording:Check all the added devices alarm message in history .

Other fuction

Linkage alarm setting

- To connect two Sensors via scene setting.

Device sharing

- Allow others to control the device

Push notification

- Open/close push notification

Remove device

- Restore default settings; Delete and add the device again to clear the record by APP.



Make Your Home Smarter